

4500kg Ramps @ 3.6m long

Sku: 150/360

When it comes to Hyway's 4500kg rated ramps, there is two lengths to choose from. The 3.6m version is designed to load machinery onto deck heights between 1200mm - 1300mm. Perfect for loading medium sized excavators, skid-steer machines, and other machinery onto your truck. All Hyway Ramps are made from high tensile aluminium, produced right here in New Zealand!



Specifications

Length: 3600mm. Suitable for deck heights between 1200mm - 1300mm

Capacity: 4500kg (axle load across the pair)



Weight: 47kg each

A: 550mm

B: 450mm


C: 150mm

D: 45mm

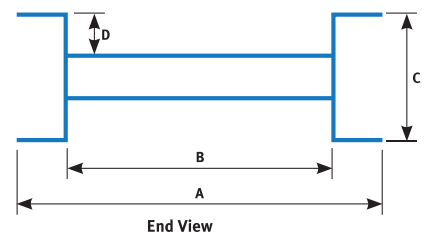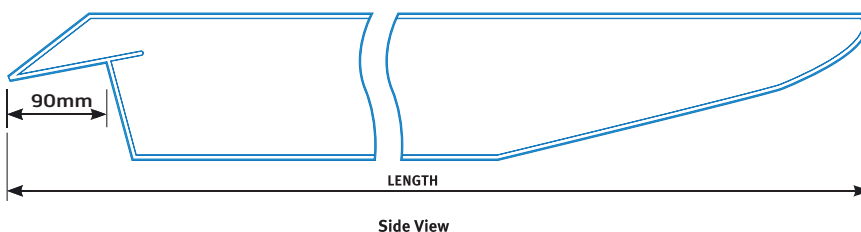

The details

All Hyway Ramps have specially developed components to achieve a balance of strength, weight and cost.

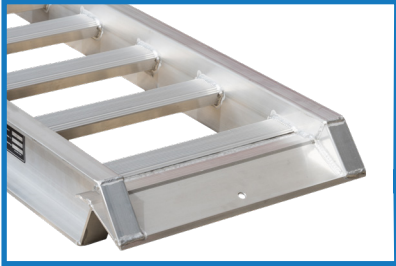

Headplate: The 150/360 ramps have a 90mm headplate which sits on the back of your truck deck. The headplate is positioned for a 20° loading gradient.

We recommend using the two steel pins supplied to secure the ramps to your deck through the headplate.



Capacity: These ramps are rated for a 4500kg axle load rating across the pair. The rated capacity must exceed the heaviest axle or concentration of load.

An excavator or tracked machine distributes its weight along the length of its tracks. However, a wheeled machine may have an uneven weight distribution between axles.



Rungs: High tensile aluminium extrusions. 430mm wide, set down 45mm into the side beams. They have two ribs on the top surface, designed for superior traction.

Important tip: Don't let your tracks or tyres touch the side beams when loading/unloading your machinery. If your tyres or tracks are wide, let us know and we'll build you a ramp to suit your requirement.

We also specialise in custom builds. If there's any specification that doesn't quite suit, talk to us and we'll help you out.

Designed and Manufactured here in New Zealand