

# 150 SERIES

4.5T RAMPS AT 3.3M LONG

## SPECIFICATIONS

**CAPACITY:** 4500kg per pair

**LENGTH:** 3300mm

**WIDTH:** 550mm overall

**WEIGHT:** 43kg each


**HEIGHT SUITABILITY:** 900mm - 1200mm

**SKU:** 150/330

## OVERVIEW

When it comes to our 4500kg rated ramps, there are two lengths to choose from. The 3300mm version is designed to load machinery onto deck heights between 900mm - 1200mm.

Perfect for loading medium sized excavators, skidsteer machines, and other machinery onto your truck. All Hyway ramps are made from high tensile aluminium, produced right here in New Zealand.

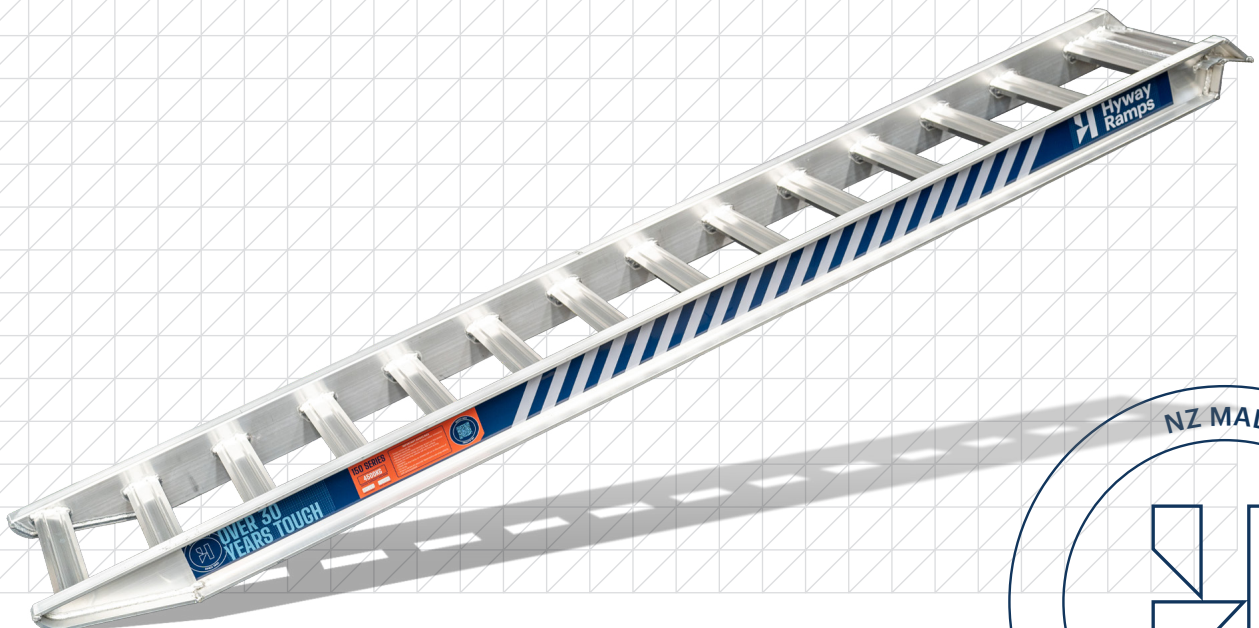


# THE DETAILS

**150 SERIES**  
**4500KG**

RATED CAPACITY PER PAIR


## CAPACITY

These ramps are rated for 4500kg **axle load** rating across the pair. The rated capacity must exceed the heaviest axle of the machine you are loading.

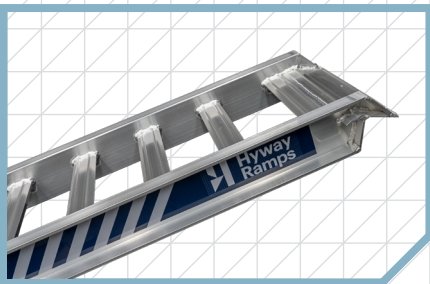


## HEADPLATE

All our Heavy Industrial ramps have a unique headplate design. Our "cut out" design gives you the ability to use the full width of the deck to load and unload your machinery.

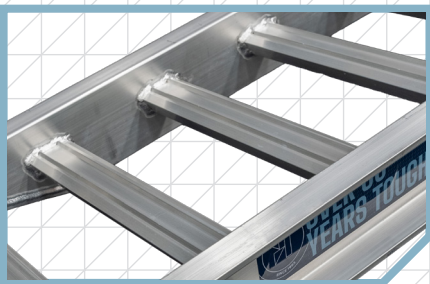

## RUNGS

Each rung is made out of high tensile aluminium extrusions produced right here in New Zealand. These 4500kg ramps have rungs 450mm wide, which are set down 45mm into the side beams. They have two ribs on the top surface, designed for superior traction.

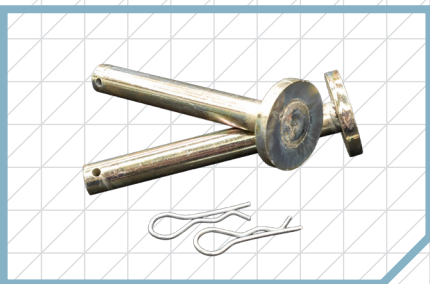

## SECURING PINS

We recommend using the steel pins supplied, to secure the ramps to your deck through the headplate. This will prevent the ramps from creeping during loading and unloading.