


175 SERIES

6T RAMPS AT 3.6M LONG

SPECIFICATIONS

OVERVIEW

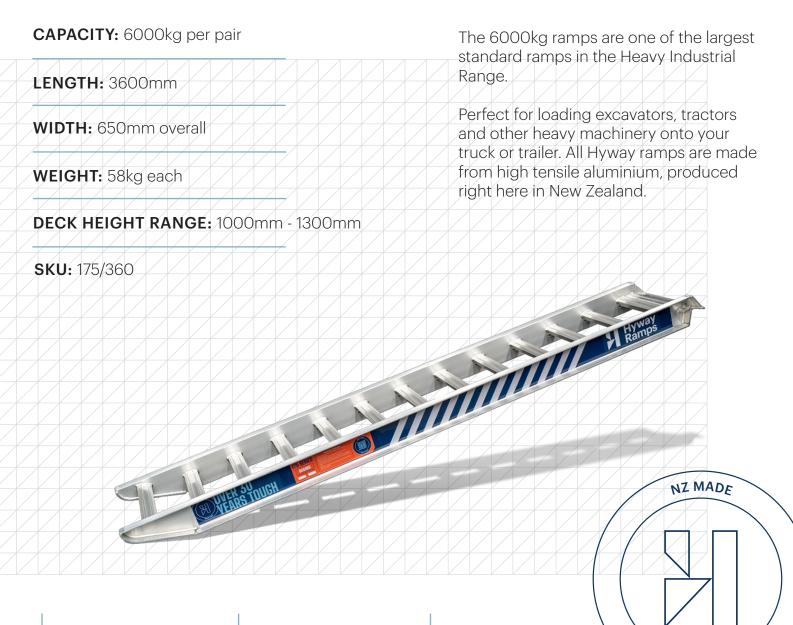

www.hyway.co.nz



THE FEATURES




CAPACITY

These ramps are rated for 6000kg **axle load** rating across the pair. The rated capacity must exceed the heaviest axle of the machine you are loading.

HEADPLATE

All our Heavy Industrial ramps have a unique headplate design. Our "cut out" design gives you the ability to use the full width of the deck to load and unload your machinery.



H Ran

RUNGS

Each rung is made out of high tensile aluminium extrusions produced right here in New Zealand. These 6000kg ramps have rungs 600mm wide, which are set down 60mm into the side beams. They have two ribs on the top surface, designed for superior traction.

SECURING PINS

We recommend using the steel pins supplied, to secure the ramps to your deck through the headplate. This will prevent the ramps from creeping during loading and unloading.

0800 777 267

www.hyway.co.nz