

200 SERIES

7.5T RAMPS AT 3.6M LONG

SPECIFICATIONS

CAPACITY: 7500kg per pair

LENGTH: 3600mm

RUNG WIDTH: 500mm

RAMP WIDTH: 630mm overall

WEIGHT: 62kg each

DECK HEIGHT RANGE: 1000mm - 1300mm

SKU: 200/360

OVERVIEW

Our 7500kg rated ramps are a popular model in the Heavy Industrial Range. Built for strength, safety, and ease of use, these Ramps are ideal for loading bigger excavators, skid steers and tractors.

Use these Ramps to save yourself transport costs by transporting your own gear.




THE FEATURES



CAPACITY


These ramps are rated for 7500kg **axle load** rating across the pair. The rated capacity shown on the sticker **must** exceed the heaviest axle of the machine you are loading.

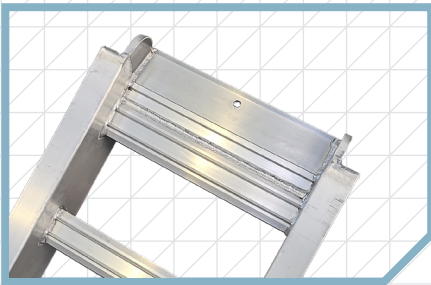

HEADPLATE

Our Unique Headplate Cutout design has now been incorporated across the entire Heavy Industrial Range.


In some cases, you might be loading a machine with tracks or tyres that are nearly as wide as your deck. Hyway has thought of that, and this innovation allows our Ramps to extend across the full width of your deck or trailer.

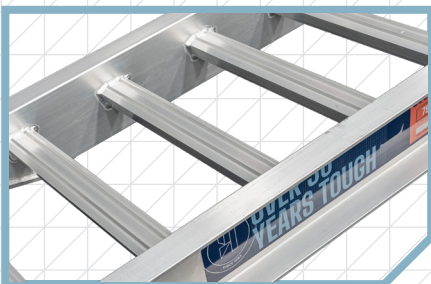

RUNGS

These ramps have 500mm wide rungs which are set down 60mm into the side beams.

Our rungs have two ribs on the top surface that provide extra wear and superior traction.

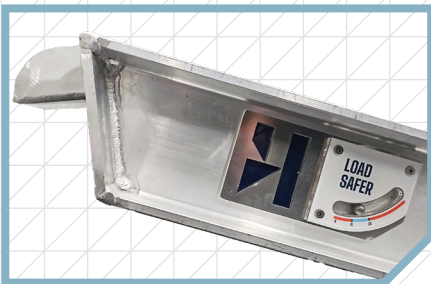

ANGLE IQ

Know your angle with Hyway's Angle IQ. Ramps in our Heavy Industrial Range are fitted with a built-in inclinometer. This gives you a quick and clear reading of your loading angle. Stay between 15° and 23°, and you'll be operating within the safe zone preventing your machine from tipping, slipping, or sustaining any underbody damage.