

150 SERIES

4.5T RAMPS AT 3.6M LONG

SPECIFICATIONS

CAPACITY: 4500kg per pair

LENGTH: 3600mm

RUNG WIDTH: 450mm

RAMP WIDTH: 550mm overall

WEIGHT: 46kg each

DECK HEIGHT RANGE: 1000mm - 1300mm


SKU: 150/360

OVERVIEW

Our 4500kg rated ramps are a popular and versatile model in the Heavy Industrial Range.

With two lengths to choose from, the 3600mm model is designed to load machinery onto a truck with a deck height of 1000 -1300mm.

Built for strength, safety, and ease of use, these Ramps are ideal for loading medium sized excavators, skid steers and small tractors.

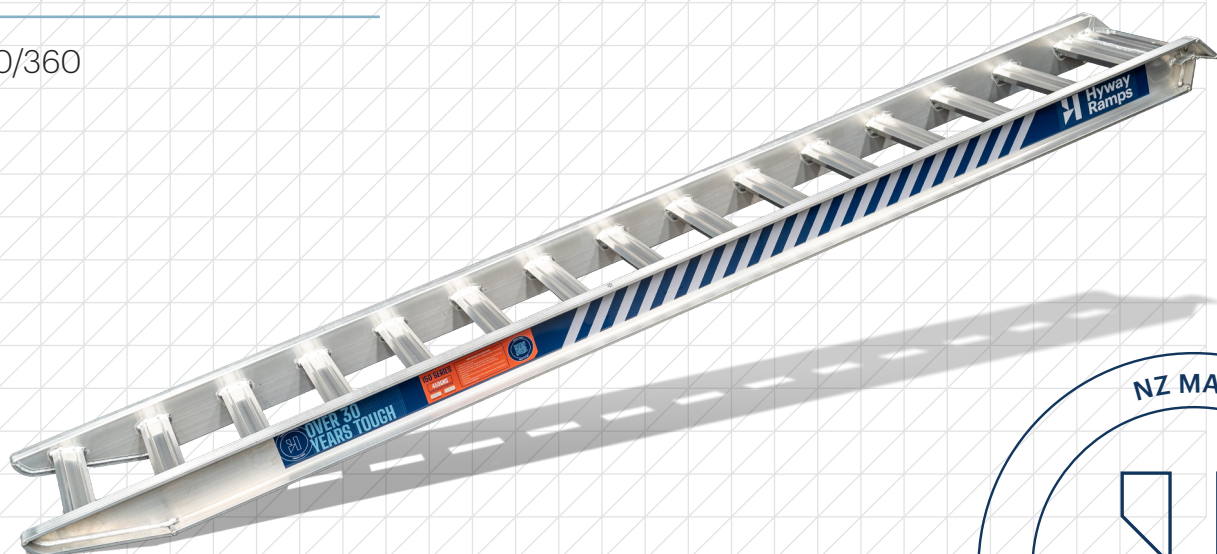

THE FEATURES

150 SERIES
4500KG

RATED CAPACITY PER PAIR

CAPACITY

These ramps are rated for 4500kg **axle load** rating across the pair. The rated capacity shown on the sticker **must** exceed the heaviest axle of the machine you are loading.

HEADPLATE

Our Unique Headplate Cutout design has now been incorporated across the entire Heavy Industrial Range.

In some cases, you might be loading a machine with tracks or tyres that are nearly as wide as your deck. Hyway has thought of that, and this innovation allows our Ramps to extend across the full width of your deck or trailer.

RUNGS

These ramps have 450mm wide rungs which are set down 45mm into the side beams.

Our rungs have two ribs on the top surface that provide extra wear and superior traction.

ANGLE IQ

Know your angle with Hyway's Angle IQ. Ramps in our Heavy Industrial Range are fitted with a built-in inclinometer. This gives you a quick and clear reading of your loading angle. Stay between 15° and 23°, and you'll be operating within the safe zone preventing your machine from tipping, slipping, or sustaining any underbody damage.

