

200 SERIES

9T RAMPS AT 3.3M LONG

SPECIFICATIONS

CAPACITY: 9000kg per pair

LENGTH: 3300mm

RUNG WIDTH: 500mm

RAMP WIDTH: 630mm overall

WEIGHT: 56kg each


DECK HEIGHT RANGE: 1000mm - 1300mm

SKU: 200/330

OVERVIEW

Our 9000kg rated ramps are the largest standard model in the Heavy Industrial Range.

These are serious Ramps built to load the largest machines to fit on a 6-wheeler. Use these Ramps to save yourself transport costs by transporting your own gear.

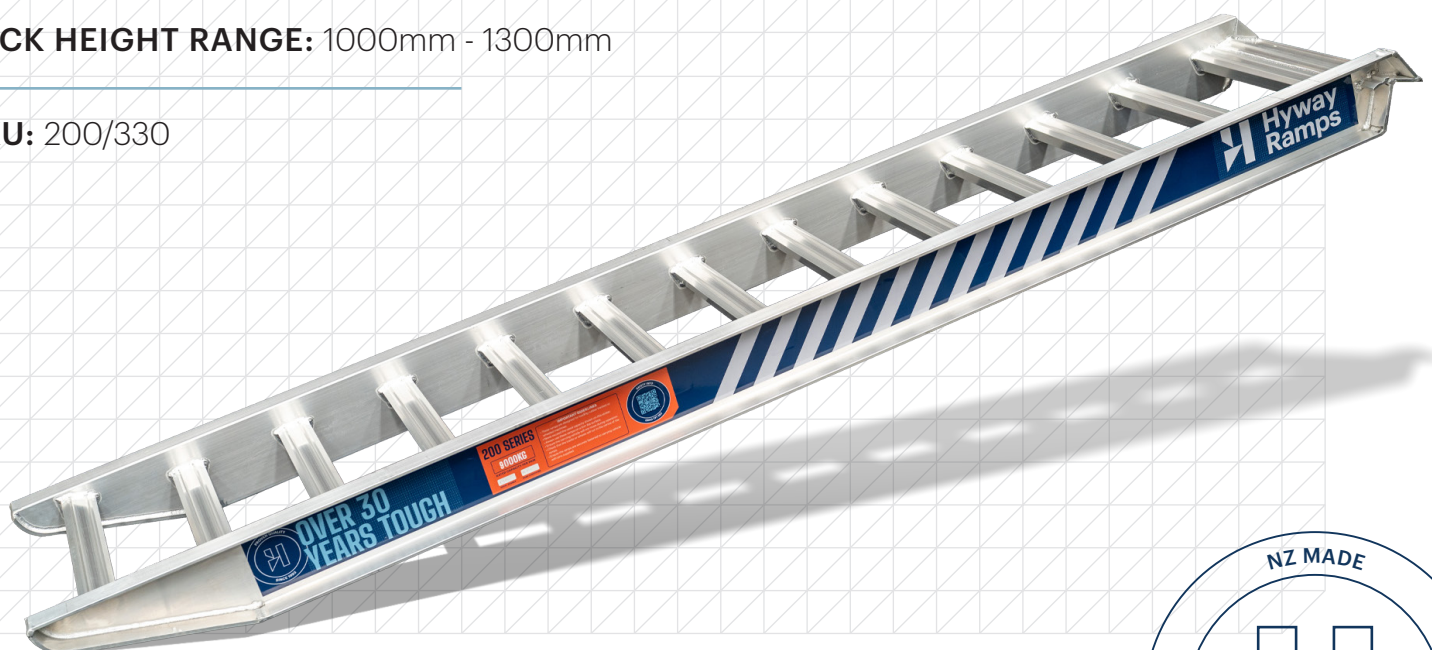


THE FEATURES




CAPACITY

These ramps are rated for 9000kg **axle load** rating across the pair. The rated capacity shown on the sticker **must** exceed the heaviest axle of the machine you are loading.

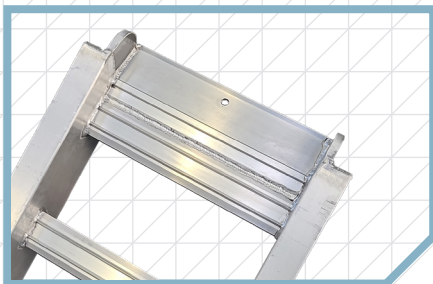


HEADPLATE

Our Unique Headplate Cutout design has now been incorporated across the entire Heavy Industrial Range. In some cases, you might be loading a machine with tracks or tyres that are nearly as wide as your deck. Hyway has thought of that, and this innovation allows our Ramps to extend across the full width of your deck or trailer.

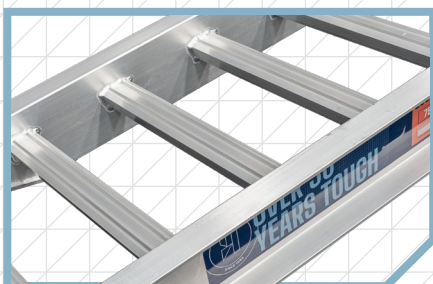

RUNGS

These ramps have 500mm wide rungs which are set down 60mm into the side beams. Our rungs have two ribs on the top surface that provide extra wear and superior traction.

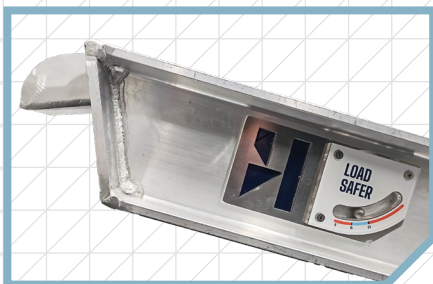

ANGLE IQ

Know your angle with Hyway's Angle IQ. Ramps in our Heavy Industrial Range are fitted with a built-in inclinometer. This gives you a quick and clear reading of your loading angle. Stay between 15° and 23°, and you'll be operating within the safe zone preventing your machine from tipping, slipping, or sustaining any underbody damage.